




Product specifications		
Reference	FSL-1-12	
Capability	Hopper	1L
	Dosing	2-3 kilos/hour
Consumable	Pellet	
	Diameter range	Ø1-4 mm
Tube	Outer diameter	Ø12 mm
	Inner diameter	Ø8 mm
	Length	2 m
	Material	Flexible polyurethane
Power	Supply	12VDC 100W
	Air pressure	5.5 kpa
Interface	Dosing blade switch	
	PWM Air pressure	
Level sensor	Capacitive	Ø12mm
Measurements	75 x 115 x 186 mm	
Weight	≈1000g	

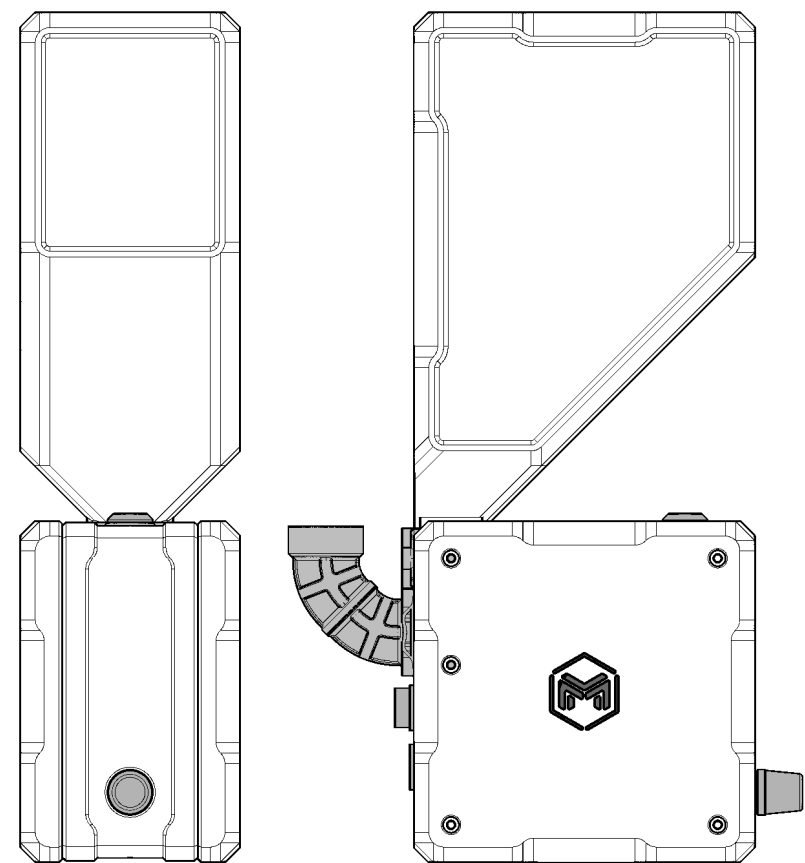


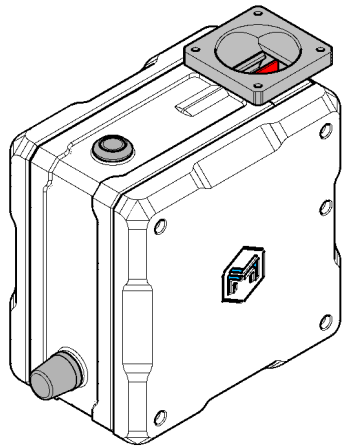


33mm flange

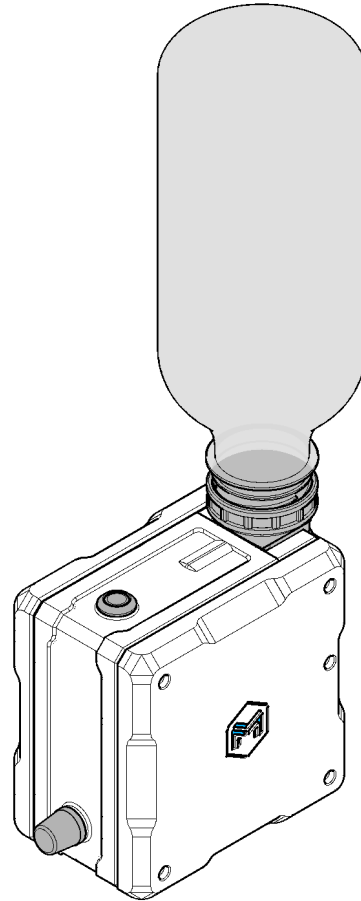

PET 38mm 3 start bottle

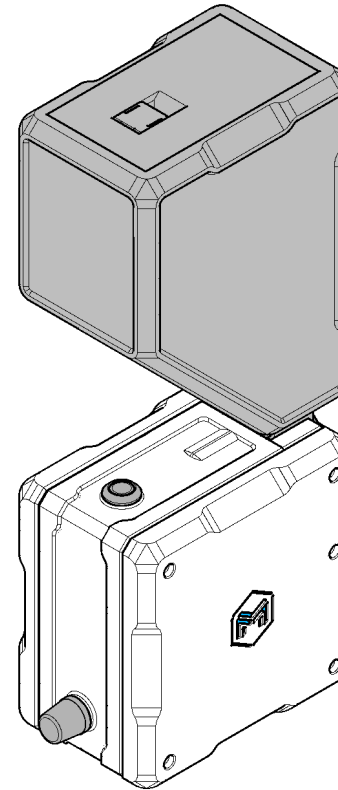



Printed hopper

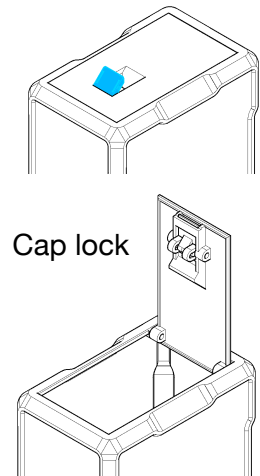


Cap lock

Plug and play

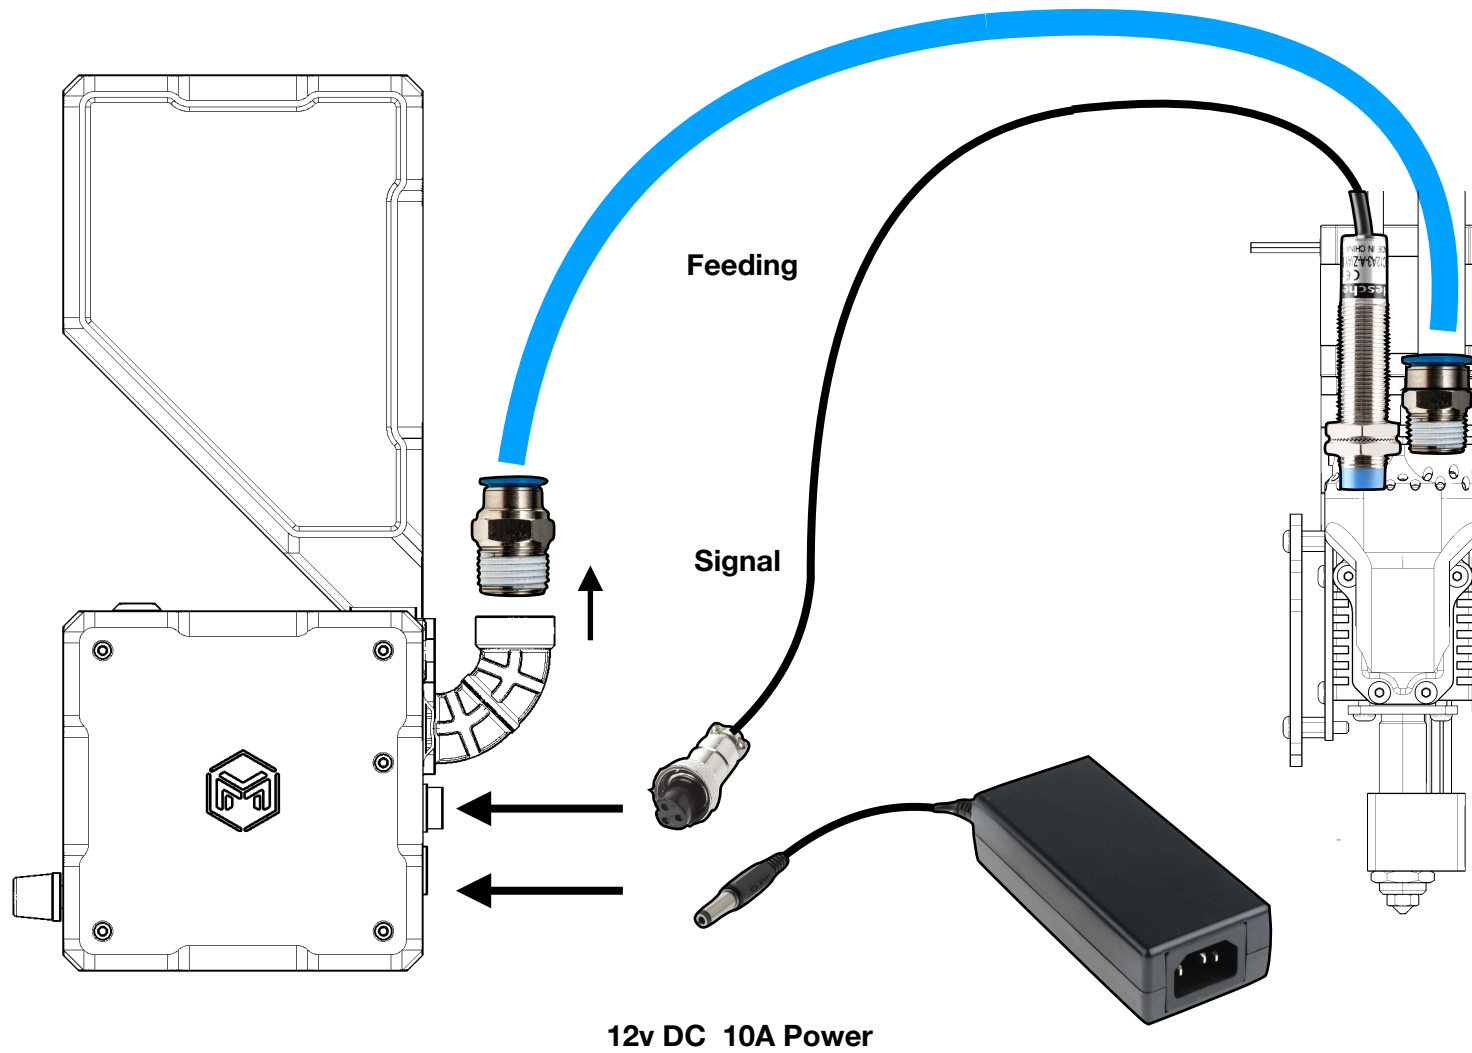

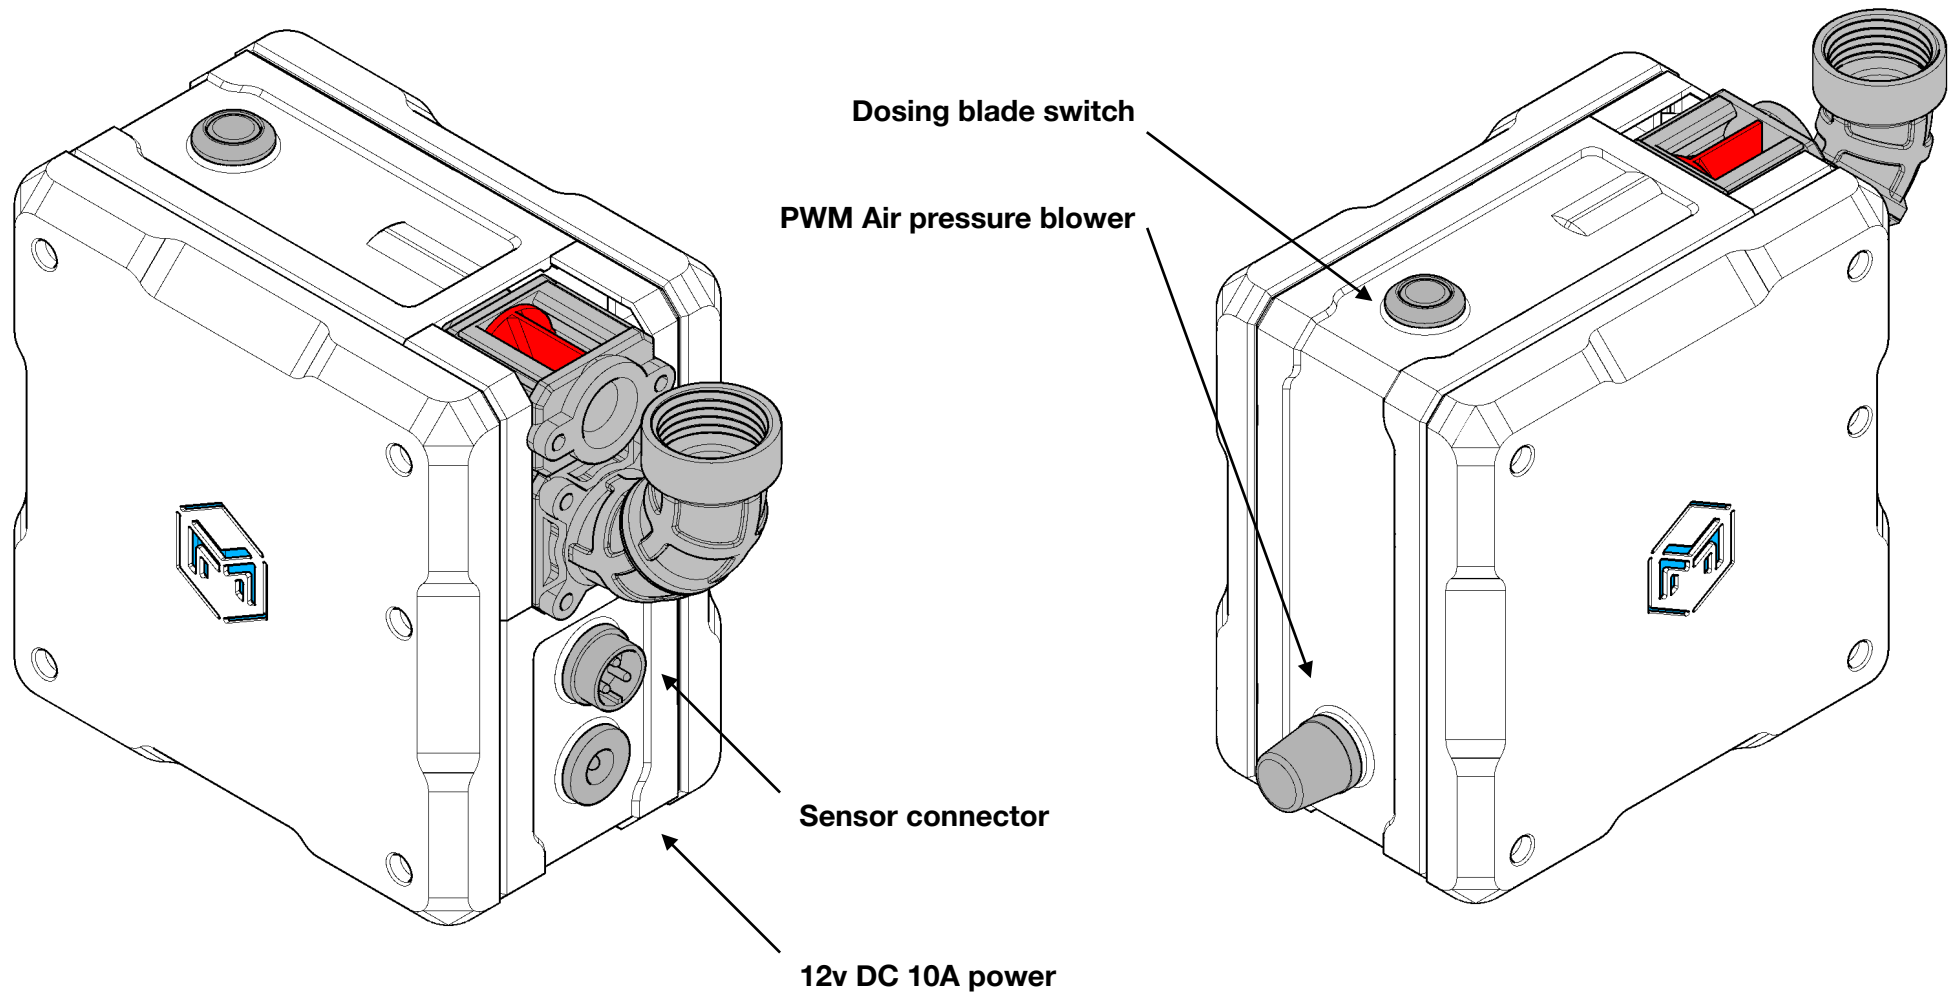

User maintenance

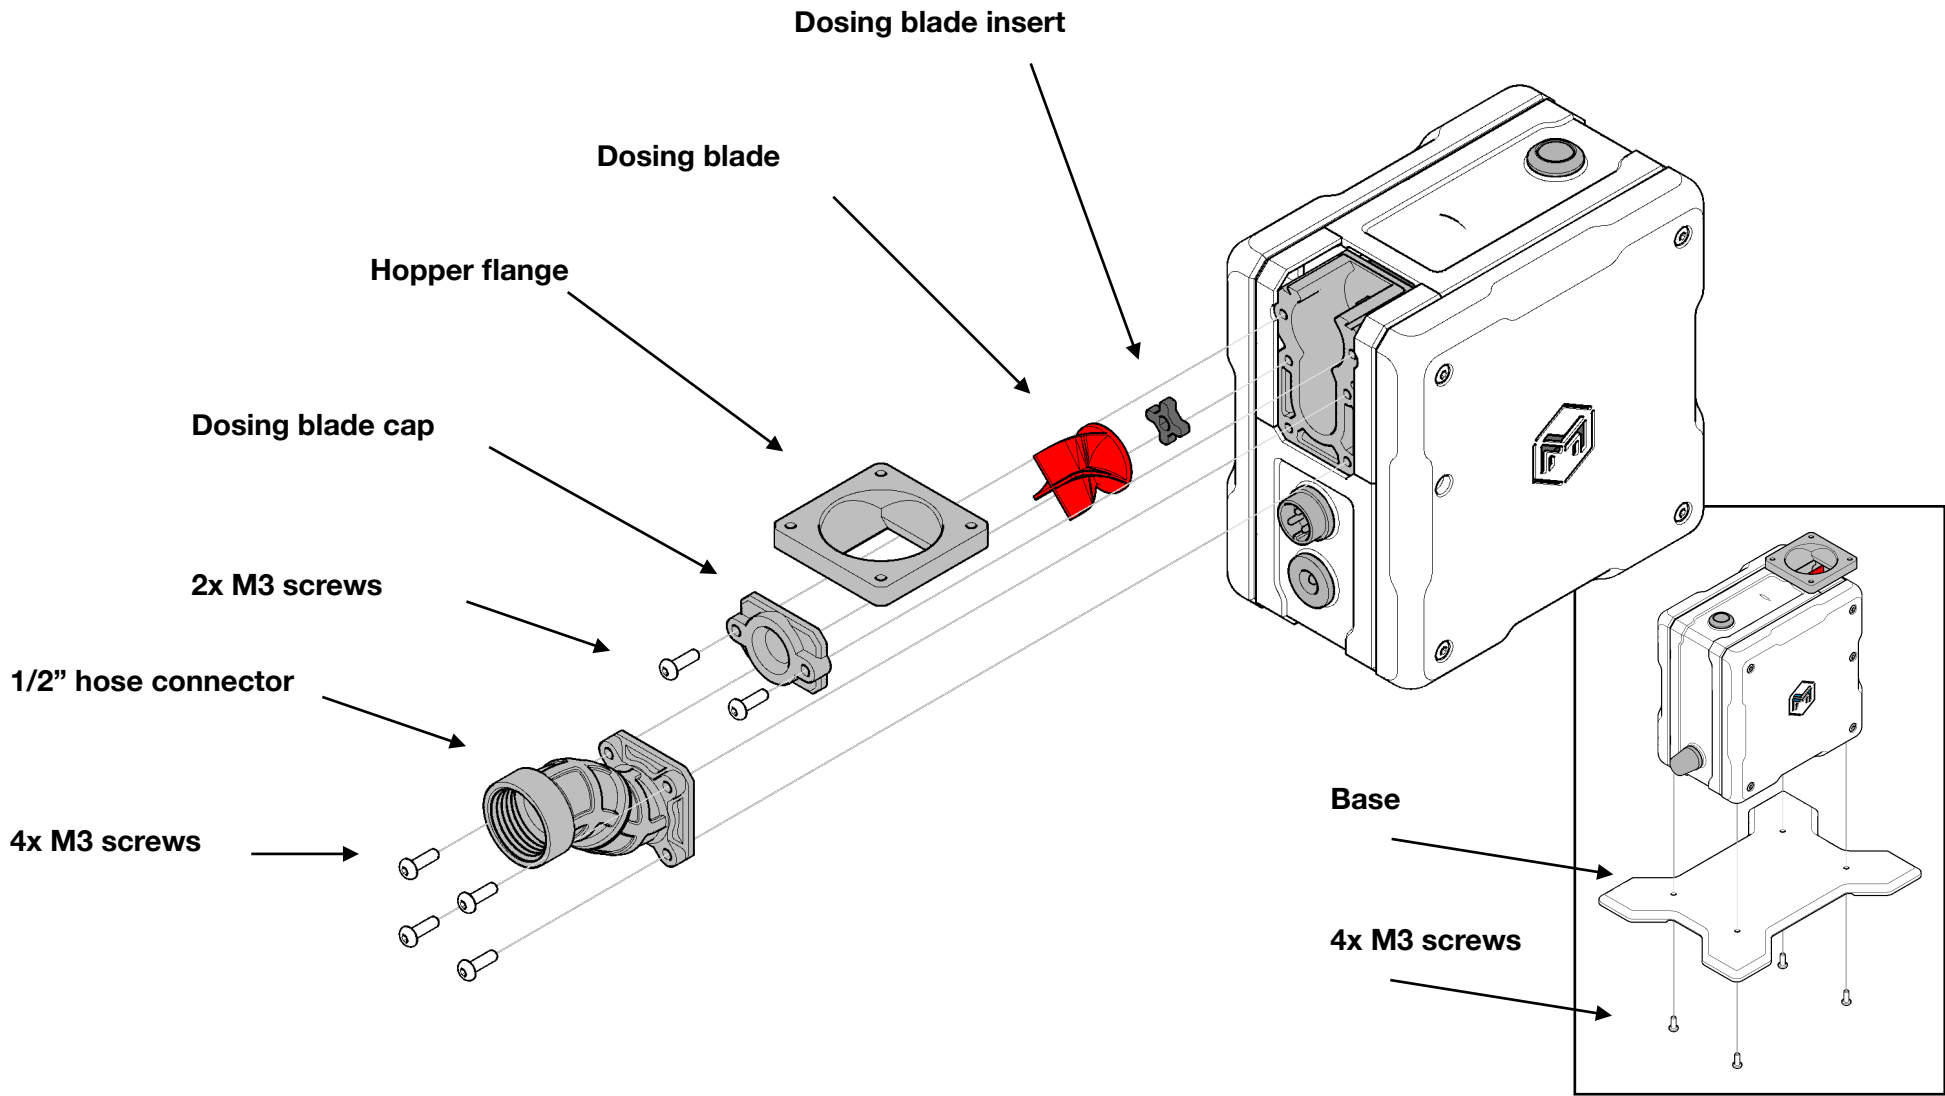

Notes

**Download STL**


<https://mahor.xyz/wp-content/uploads/2024/10/Feedstock-lite.zip>

**Distance adjustment**

Temperature changes affect the sensing distance, calibrate at operating temperature.

**Disclaimer**

After printing is finished, the working temperature drops and may affect the sensing distance.
it is recommended to switch off the device.

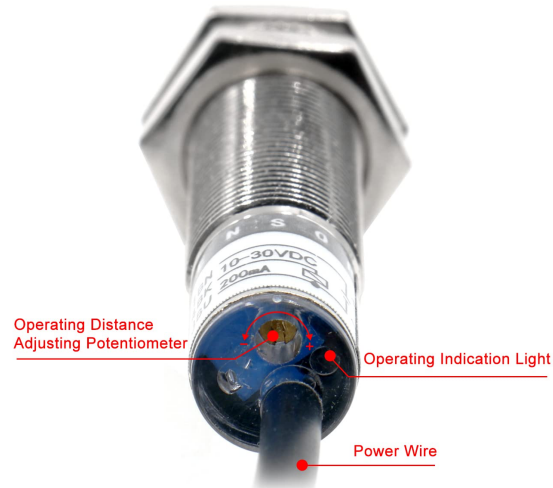

MAHOR·XYZ

Cuenta de WhatsApp Business

